

FLEXY TRANSDOCK GG

Description

Composite hose made from heavy duty polypropylene fabrics and films with a double layer of abrasion resistant PVC coated fabric cover. Inner and outer wires are galvanised steel.

Color: Blue



Principal Application

Suitable for the heavy duty suction and discharge transfer of palm oils products and aromatic content petroleum products in road and rail tankers, maritime operation such as dockside and ship to shore applications. Suitable carriage of black and white oils.

Safety Factor (Burst)

4:1

Manufacturing Standard

EN13765:2018

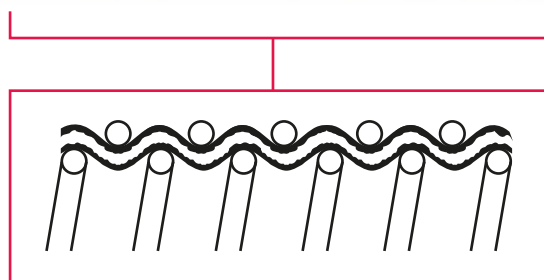


TABLE OF SPECIFICATIONS

Nominal Bore (Inch / mm)	Outer Diameter (mm)	Bend Radius (mm)	Weight Per metre (kg/m)	Working Pressure psi / bars	Test Pressure psi / bars	Temperature °C
2in / 50mm	69mm	250mm	2.08			
3in / 75mm	97mm	330mm	4.30			
4in / 100mm	120mm	430mm	7.50			
6in / 150mm	175mm	550mm	11.00	200 psi / 14 bars	300 psi / 21 bars	-30 °C to 100 °C
8in / 200mm	240mm	750mm	16.00			
10in / 250mm	295mm	1000mm	23.00			