

FLEXY TRANSOIL GG

Description


Composite hose made from heavy duty polypropylene fabrics and films with a double layer of abrasion resistant PVC coated fabric cover. Inner and outer wires are galvanised steel.

Color: Blue



Principal Application

Suitable for the heavy duty suction and discharge transfer of palm oils products and aromatic content petroleum products in road and rail tankers, maritime operation such as dockside and ship to shore applications. Suitable carriage of black and white oils.

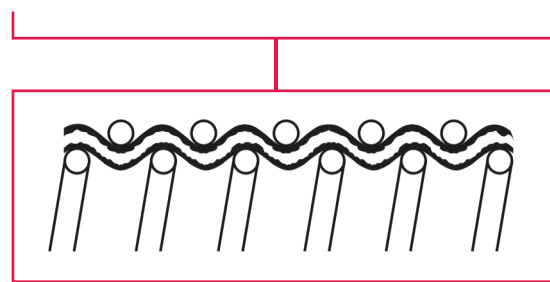

Safety Factor (Burst)

4:1

Manufacturing Standard

EN13765:2018

TABLE OF SPECIFICATIONS

Nominal Bore (Inch / mm)	Outer Diameter (mm)	Bend Radius (mm)	Weight Per metre (kg/m)	Working Pressure (psi / bars)	Test Pressure (psi / bars)	Temperature (°C)
3in / 75mm	97mm	330mm	4.30	145 psi / 10 bars	217 psi / 15 bars	-30 °C to 100 °C
4in / 100mm	120mm	430mm	7.50			