

Flexi Pig type FLEX-C2

For the cleaning of new pipelines, the removal of sand, rust, sludge, barnacles, algae and clay deposits and improving the flow.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.60
3"	185	125	0.90
4"	210	155	1.10
6"	325	220	4.00
8"	395	290	7.00
10"	490	370	11.00
12"	555	440	15.00
14"	620	490	24.00
16"	690	560	29.00



Flexi Pig type FLEX-C3

For the cleaning of new pipelines, the removal of sand, rust, sludge, barnacles, algae and clay deposits and improving the flow.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.90
3"	185	125	1.00
4"	210	155	1.50
6"	325	220	5.50
8"	395	290	9.50
10"	490	370	15.00
12"	555	440	21.00
14"	620	490	31.50
16"	690	560	39.00



Flexi Pig type FLEX-BD-C2

For the cleaning of new pipelines, the removal of sand, rust, sludge, barnacles, algae and clay deposits, and the improvement of the flow. For bidirectional applications.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.60
3"	185	125	0.90
4"	210	155	1.00
6"	325	220	3.90
8"	395	290	6.40
10"	490	370	9.80
12"	555	440	13.20



Flexi Pig type FLEX-BD-C3

For the cleaning of new pipelines, the removal of sand, rust, sludge, barnacles, algae and clay deposits, and the improvement of the flow. For bi-directional applications.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.90
3"	185	125	1.00
4"	210	155	1.50
6"	325	220	5.50
8"	395	290	9.50
10"	490	370	15.00
12"	555	440	21.00




Steel Body Pig type KL-C2

For cleaning of new pipelines and removal of, amongst others, rust.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
6"	290	165	4.0
8"	340	215	6.3
10"	415	270	9.8
12"	470	320	14.0
14"	535	355	20.0
16"	585	400	25.0
18"	600	460	57.0
20"	650	510	79.0
22"	700	560	93.0
24"	760	610	104.0
26"	815	660	124.0
28"	870	710	139.0
30"	930	770	161.0
32"	960	820	181.0
34"	1020	870	257.0
36"	1085	920	285.0
38"	1120	970	312.0
40"	1170	1020	349.0
42"	1220	1070	377.0
44"	1270	1120	421.0
46"	1340	1170	452.0
48"	1400	1220	488.0
56"	1630	1420	673.0

Specifications subject to change without notice.

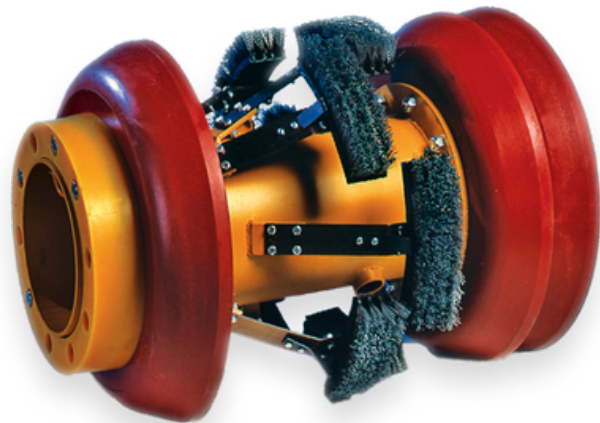

Steel Body Pig type KL-C3

For cleaning and rust removal of (new) pipelines, separating liquids and the emptying of pipelines. In addition, for the removal of sand mud or black powder.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
6"	290	165	3.0
8"	340	215	4.0
10"	415	270	7.3
12"	470	320	9.4
14"	535	355	14.6
16"	585	400	19.0
18"	600	460	40.0
20"	650	510	54.0
22"	700	560	66.0
24"	760	610	78.0
26"	815	660	95.0
28"	870	710	111.0
30"	930	770	132.0
32"	960	820	149.0
34"	1020	870	227.0
36"	1085	920	258.0
38"	1120	970	289.0
40"	1170	1020	329.0
42"	1220	1070	351.0
44"	1270	1120	400.0
46"	1340	1170	436.0
48"	1400	1220	477.0
56"	1630	1420	676.0

Specifications subject to change without notice.



Steel Body Pig type KL-C4

For cleaning and rust removal of (new) pipelines, separating liquids and the emptying of pipelines. In addition, for the removal of sand, mud, condensate, algae, barnacles or black powder.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
6"	290	165	5
8"	340	215	7
10"	415	270	11
12"	470	320	16
14"	535	355	23
16"	585	400	30
18"	600	460	63
20"	650	510	87
22"	700	560	103
24"	760	610	115
26"	815	660	137
28"	870	710	154
30"	930	770	177
32"	960	820	200
34"	1020	870	275
36"	1085	920	207
38"	1120	970	335
40"	1170	1020	374
42"	1220	1070	402
44"	1270	1120	447
46"	1340	1170	480
48"	1400	1220	523
56"	1630	1420	735

Specifications subject to change without notice.



Steel Body Pig type KL-BD-C4

For bidirectional cleaning of (new) pipelines. In addition, for the removal of sand, rust, mud or condensate.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
6"	290	165	5
8"	340	215	7
10"	415	270	11
12"	470	320	16
14"	535	355	23
16"	585	400	30
18"	600	460	63
20"	650	510	87
22"	700	560	103
24"	760	610	115
26"	815	660	137
28"	870	710	154
30"	930	770	177
32"	960	820	200
34"	1020	870	275
36"	1085	920	207
38"	1120	970	335
40"	1170	1020	374
42"	1220	1070	402
44"	1270	1120	447
46"	1340	1170	480
48"	1400	1220	523
56"	1630	1420	735

Specifications subject to change without notice.



Steel Body Pig type KL-BD-C6

For bidirectional cleaning of (new) pipelines. In addition, for the removal of sand, rust, mud or condensate

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
6"	290	165	5
8"	340	215	8
10"	415	270	11
12"	470	320	17
14"	535	355	24
16"	585	400	32
18"	600	460	60
20"	650	510	98
22"	700	560	118
24"	760	610	132
26"	815	660	159
28"	870	710	178
30"	930	770	212
32"	960	820	234
34"	1020	870	305
36"	1085	920	334
38"	1120	970	372
40"	1170	1020	442
42"	1220	1070	458
44"	1270	1120	509
46"	1340	1170	551
48"	1400	1220	584
56"	1630	1420	817

Specifications subject to change without notice.