



Flexi Pig type FLEX-S2

For the emptying of pipes. In addition, for the removal of sand, mud or condensate.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.3
3"	185	125	0.5
4"	210	155	0.7
6"	325	220	2.6
8"	395	290	4.4
10"	490	370	8.6
12"	555	440	10.5
14"	620	490	16.0
16"	690	560	20.0
18"	810	645	35.0
20"	870	705	40.0
22"	920	745	48.0
24"	1035	875	59.0



Flexi Pig type FLEX-S3

For hydrostatic testing, the separation of liquids and emptying of the pipes. In addition, for the removal of sand, mud or condensate.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.35
3"	185	125	0.55
4"	210	155	0.80
6"	325	220	3.00
8"	395	290	5.00
10"	490	370	9.20
12"	555	440	12.80
14"	620	490	19.80
16"	690	560	25.60
18"	810	645	41.00
20"	870	705	48.00
22"	920	745	58.00
24"	1035	875	70.00




Flexi Pig type FLEX-S4

For hydrostatic testing, the separation of liquids and emptying of the pipes. In addition, for the removal of sand, mud or condensate.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.40
3"	185	125	0.60
4"	210	155	1.00
6"	325	220	3.40
8"	395	290	6.00
10"	490	370	11.00
12"	555	440	15.40
14"	620	490	23.00
16"	690	560	31.50
18"	810	645	48.00
20"	870	705	58.00
22"	920	745	60.00
24"	1035	875	85.00

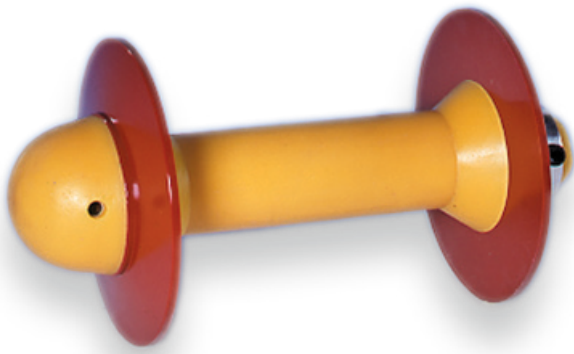


Flexi Pig type FLEX-BD-S2

For hydrostatic testing, the separation of liquids and emptying of the pipes. Also for removing of sand, mud, barnacles, algae and tar and the improvement of the flow. For bidirectional applications.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.35
3"	185	125	0.50
4"	210	155	0.70
6"	325	220	2.90
8"	395	290	4.60
10"	490	370	8.50
12"	555	440	11.00

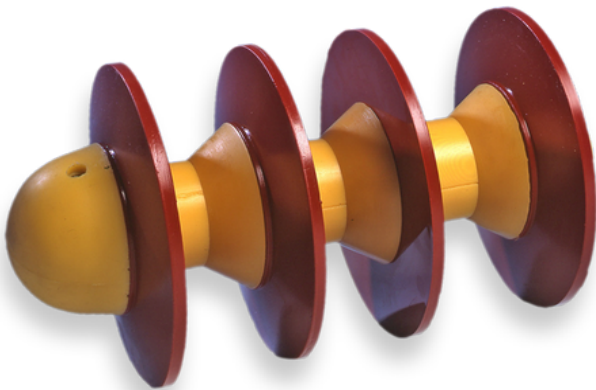

Flexi Pig type FLEX-BD-S4

For hydrostatic testing, the separation of liquids and emptying of the pipes. Also for removing of sand, mud, barnacles, algae and tar and the improvement of the flow. For bidirectional applications.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.45
3"	185	125	0.65
4"	210	155	0.90
6"	325	220	3.20
8"	395	290	5.20
10"	490	370	9.40
12"	555	440	11.90



Steel Body Pig type KL-S2

For separation of liquids and emptying of pipelines. In addition, for the removal of condensate.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
6"	290	165	2.6
8"	340	215	3.7
10"	415	270	6.5
12"	470	320	8.2
14"	535	355	13.2
16"	585	400	15
18"	600	460	45
20"	650	510	67
22"	700	560	90
24"	760	610	102
26"	815	660	110
28"	870	710	126
30"	930	770	152
32"	960	820	168

Specifications subject to change without notice.

Steel Body Pig type KL-S3

For separation of liquids and emptying of pipelines. In addition, for the removal of condensate.



Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
6"	290	165	2.6
8"	340	215	3.7
10"	415	270	6.5
12"	470	320	8.2
14"	535	355	13.2
16"	585	400	15
18"	600	460	45
20"	650	510	67
22"	700	560	90
24"	760	610	102
26"	815	660	110
28"	870	710	126
30"	930	770	152
32"	960	820	168
34"	1020	870	227
36"	1085	920	257
38"	1120	970	286
40"	1170	1020	325

Specifications subject to change without notice.




Steel Body Pig KL-S4

For light swabbing and batching of pipelines

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup	Weight (kg)
		(mm)	
6"	290	165	3.2
8"	340	215	5.1
10"	415	270	9.3
12"	470	320	12.8
14"	535	355	19.6
16"	585	400	25.0
18"	600	460	58.0
20"	650	510	82.0
22"	700	560	101.0
24"	760	610	115.0
26"	815	660	136.0
28"	870	710	156.0
30"	930	770	184.0
32"	960	820	203.0
34"	1020	870	246.0
36"	1085	920	278.0
38"	1120	970	309.0
40"	1170	1020	349.0
42"	1220	1070	369.0
44"	1270	1120	416.0
46"	1340	1170	451.0
48"	1400	1220	492.0
56"	1630	1420	695.0

Specifications subject to change without notice.

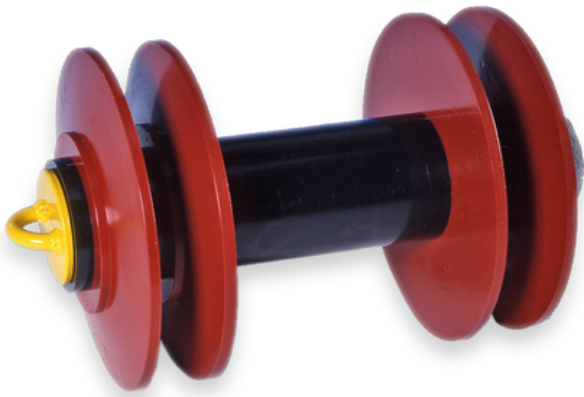


Steel Body Pig type KL-BD-S4

For cleaning and rust removal of (new) pipelines, separating liquids and the emptying of pipelines. In addition, for the removal of sand, mud, condensate, algae, barnacles or black powder.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
6"	290	165	3.0
8"	340	215	4.0
10"	415	270	7.3
12"	470	320	9.4
14"	535	355	14.6
16"	585	400	19.0
18"	600	460	40.0
20"	650	510	54.0
22"	700	560	66.0
24"	760	610	78.0
26"	815	660	95.0
28"	870	710	111.0
30"	930	770	132
32"	960	820	149
34"	1020	870	227
36"	1085	920	258
38"	1120	970	289
40"	1170	1020	329
42"	1220	1070	351
44"	1270	1120	400
46"	1340	1170	436
48"	1400	1220	477
56"	1630	1420	676

Specifications subject to change without notice.

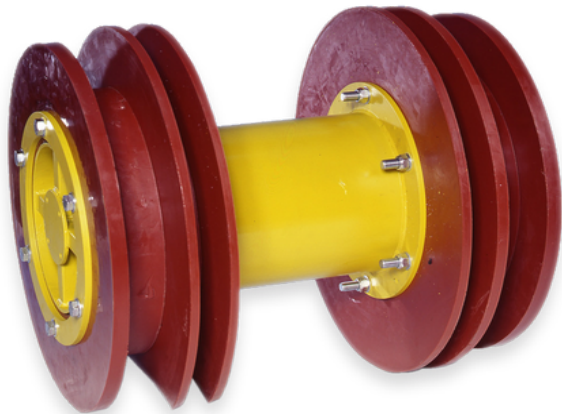


Steel Body Pig type KL-BD-S6

For cleaning and rust removal of (new) pipelines, separating liquids and the emptying of pipelines. In addition, for the removal of sand, mud, condensate, algae, barnacles or black powder.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
6"	290	165	3.1
8"	340	215	4.3
10"	415	270	7.7
12"	470	320	9.3
14"	535	355	15.8
16"	585	400	20.6
18"	600	460	60.0
20"	650	510	90.0
22"	700	560	114.0
24"	760	610	127.0
26"	815	660	151.0
28"	870	710	171.0
30"	930	770	209.0
32"	960	820	225.0
34"	1020	870	280.0
36"	1085	920	313.0
38"	1120	970	352.0
40"	1170	1020	393.0
42"	1220	1070	430.0
44"	1270	1120	482.0
46"	1340	1170	527.0
48"	1400	1220	561.0
56"	1630	1420	761.0

Specifications subject to change without notice.

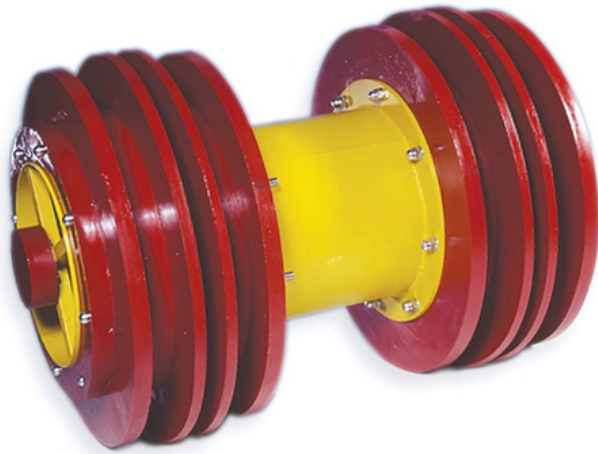

Steel Body Pig type KL-BD-S8

For cleaning and rust removal of (new) pipelines, separating liquids and the emptying of pipelines. In addition, for the removal of sand, mud, condensate, algae, barnacles or black powder.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
18"	736	460	103.0
20"	846	510	146.0
22"	928	560	180.0
24"	978	610	198.0
26"	1040	660	233.0
28"	1100	710	261.0
30"	1172	770	312.0
32"	1222	820	333.0
34"	1294	870	406.0
36"	1344	920	447.0
38"	1402	970	500.0
40"	1452	1020	553.0
42"	1514	1070	602.0
44"	1564	1120	666.0
46"	1622	1170	724.0
48"	1672	1220	767.0
56"	1900	1420	1030.0

Specifications subject to change without notice.