




Foam Pig type FP

The soft foam pig is mostly used for frequent wiping or for airdrying after hydrostatic testing. The soft foam pig has excellent water-absorption properties and is provided with a strong polyurethane back-seal in natural color. The soft foam pig will traverse diameter reductions upto 50%.

Size	D x L	Weight (kg)
2"	75x150	0.02
2.1/2"	90x200	0.03
3"	100x220	0.04
4"	130x250	0.08
5"	150x275	0.12
6"	190x300	0.21
7"	200x320	0.25
8"	230x360	0.37
10"	290x430	0.71
12"	350x560	1.10
14"	400x600	1.90
16"	450x700	2.80
18"	520x750	4.00
20"	570x800	5.00
22"	620x850	6.50
24"	670x900	8.00
26"	730x1100	11.50
28"	770x1100	13.00
30"	840x1150	15.00
32"	880x1250	19.00
34"	930x1300	22.00
36"	980x1350	25.50
38"	1030x1400	29.00
40"	1080x1540	35.00
42"	1120x1680	41.00
44"	1190x1680	47.00
46"	1240x1680	51.00
48"	1300x1800	60.00
56"	1500x2240	99.00
60"	1600x2400	129.00
64"	1700x2520	145.00
76"	2060x2820	172.00
80"	2130x3000	181.00

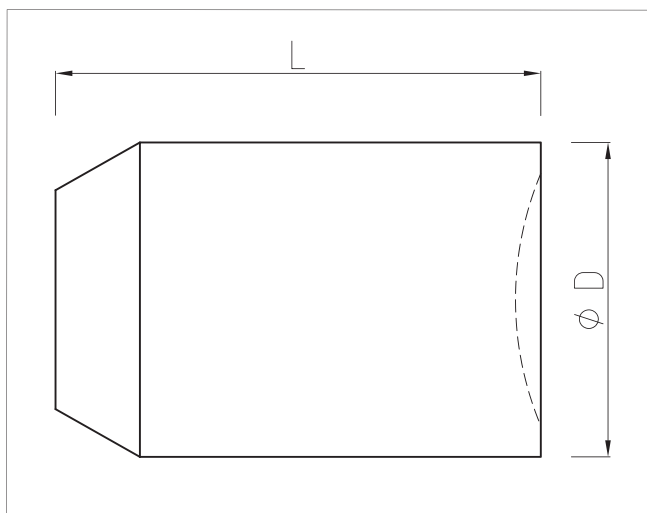

Standard dimensions in mm, Standard deviation +/- 2%.
 Spacial dimintions and executions available upon request.
 Density: 25 kg/m3 (2 lbs/cft)
 Maximum diameter reduction: 50%




Foam Pig cylindrical

The soft foam pig is mostly used for frequent wiping or for air drying after hydrostatic testing. The soft foam pig has excellent water-absorption properties. The soft foam pig will traverse diameter reductions up to 50%.

Dimensions and weight

Size	D x L	Weight (kg)
2"	75x120	0,02
2.1/2"	95x150	0,02
3"	100x160	0,03
4"	130x200	0,06
5"	170x300	0,10
6"	200x300	0,17
7"	220x350	0,20
8"	250x360	0,30
10"	310x440	0,57
12"	370x520	0,88
14"	430x600	1,52
16"	490x680	2,24
18"	540x750	3,20
20"	610x840	4,00
22"	660x850	5,20
24"	730x920	6,40
26"	760x950	9,20
28"	800x1000	10,40
30"	850x1000	12,00
32"	880x1100	15,20
34"	970x1100	17,60
36"	1000x1150	20,40
38"	1090x1200	23,20
40"	1120x1400	28,00
42"	1170x1500	32,80
44"	1230x1600	37,60
46"	1290x1600	40,80
48"	1350x1700	48,00
56"	1550x1900	79,20
60"	1650x2100	103,20
64"	1750x2250	116,00
80"	2200x2800	144,80

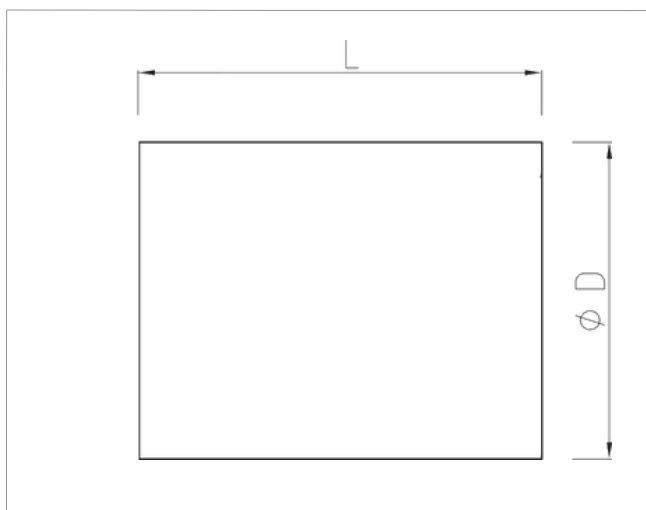


Standard dimensions in mm, standard deviation +/- 2%.
 Special dimensions and executions available upon request.
 Density: 20 kg/m³ (1½ lbs/cft)
 Maximum diameter reduction: 50%



Foam Pig type PU-MD-PL

The medium density bare foam pig is mostly used for regular on-stream wiping, as well as dewatering of pipelines. The medium density foam pig shows excellent flexibility and is provided with a strong polyurethane back-seal in blue color. The medium density foam pig will traverse diameter reductions upto 20%. From 18" top also covered with polyurethane elastomer blue colour.

Size	D x L	Weight (kg)
2"	60x160	0.04
2.1/2"	75x155	0.06
3"	85x155	0.08
4"	110x195	0.16
5"	139x220	0.23
6"	168x266	0.50
7"	177x280	0.59
8"	215x330	1.00
10"	260x415	2.00
12"	321x510	3.50
14"	346x530	4.30
16"	410x595	6.70
18"	455x660	9.20
20"	505x760	13.00
22"	555x810	16.70
24"	605x880	21.50
26"	665x990	29.30
28"	710x945	32.00
30"	760x1130	44.00
32"	810x1170	52.00
34"	855x1340	66.00
36"	910x1370	76.00
38"	960x1370	85.00
40"	1010x1470	100.00
42"	1060x1580	120.00
44"	1120x1640	138.00
46"	1160x1720	155.00
48"	1220x1760	175.00
56"	1420x2100	285.00
60"	1520x2230	400.00
64"	1620x2600	460.00
76"	1940x2820	650.00
80"	2030x3000	970.00

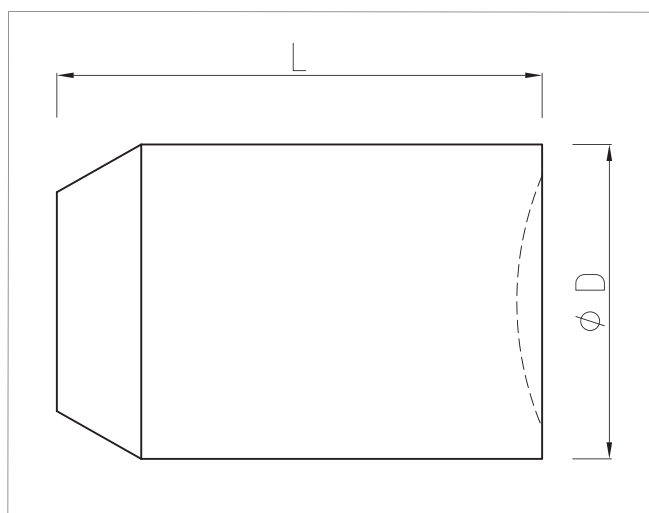


Standard dimensions in mm, Standard deviation +/- 2%.
 Spacial dimentions and executions available upon request.
 Density: 80 kg/m3 (6 lbs/cft)
 Maximum diameter reduction: 20%




Foam Pig type PU-HD-PL

The high density plain foam pig is used for onstream pigging, as well as cleaning and dewatering. The high density foam pig shows the highest wear and tear resistance and is provided with a strong polyurethane back-seal in red colour. The high density foam pig is tightly seated in the pipeline and will traverse diameter reductions upto 15%. From 18" top also covered with polyurethane elastomer red coloured.

Size	D x L	Weight (kg)
2"	60x160	0.05
2.1/2"	75x155	0.08
3"	85x155	0.10
4"	110x195	0.20
5"	139x220	0.30
6"	168x266	0.70
7"	177x280	0.80
8"	215x330	1.40
10"	260x415	2.75
12"	321x510	4.80
14"	346x530	5.80
16"	410x595	9.00
18"	455x660	12.50
20"	505x760	17.50
22"	555x810	23.00
24"	605x880	29.00
26"	665x990	40.00
28"	710x945	43.00
30"	760x1130	59.00
32"	810x1170	70.00
34"	855x1340	89.00
36"	910x1370	103.00
38"	960x1370	114.00
40"	1010x1470	136.00
42"	1060x1580	160.00
44"	1120x1640	185.00
46"	1160x1720	210.00
48"	1220x1760	236.00
56"	1420x2100	382.00
60"	1520x2230	537.00
64"	1620x2600	615.00
76"	1940x2820	1050.00
80"	2030x3000	1500.00

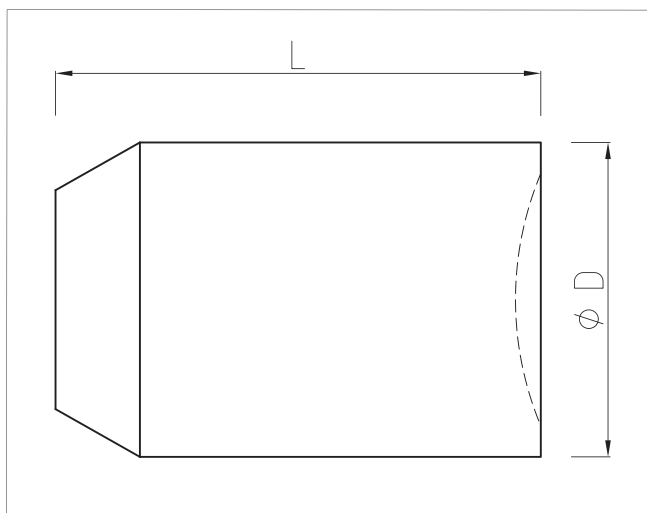


Standard dimensions in mm, Standard deviation +/- 2%.
 Spacial dimintions and executions available upon request.
 Density: 110 kg/m3 (9 lbs/cft)
 Maximum diameter reduction: 15%

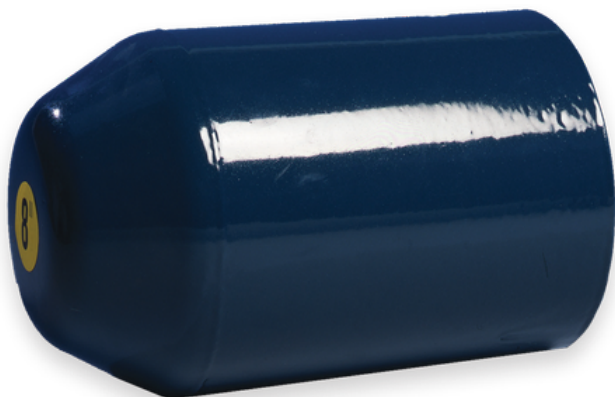


Foam Pig type PU-MD-LR

The long run foam pig is completely covered with low wear polyurethane elastomer coating. It is used both for pipeline cleaning as well as for hydrostatic testing. The medium density long run foam pig will traverse diameter reductions up to 10%.

Size	D x L	Weight (kg)
2"	60x155	0.13
2.1/2"	72x155	0.17
3"	85x155	0.22
4"	110x195	0.34
5"	135x220	0.46
6"	165x266	0.80
7"	177x280	0.96
8"	215x330	1.50
10"	267x415	2.80
12"	317x480	4.70
14"	346x530	5.80
16"	410x595	9.60
18"	463x760	11.60
20"	513x760	16.00
22"	563x810	20.00
24"	613x880	26.00
26"	673x990	34.00
28"	718x945	38.00
30"	768x1130	52.00
32"	818x1170	60.00
34"	863x1340	74.00
36"	918x1370	85.00
38"	968x1370	94.00
40"	1018x1470	113.00
42"	1068x1580	131.00
44"	1128x1640	151.00
46"	1168x1720	170.00
48"	1228x1760	191.00
56"	1430x2100	304.00
60"	1530x2230	424.00
64"	1630x2600	485.00
76"	1950x2820	710.00
80"	2040x3000	1060.00

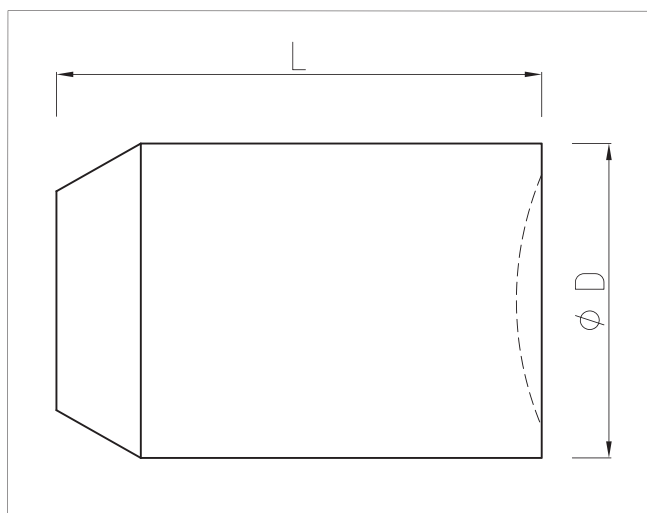

Standard dimensions in mm, Standard deviation +/- 2%.
 Spacial dimentions and executions available upon request.
 Density: 80 kg/m3 (6 lbs/cft)
 Maximum diameter reduction: 10%

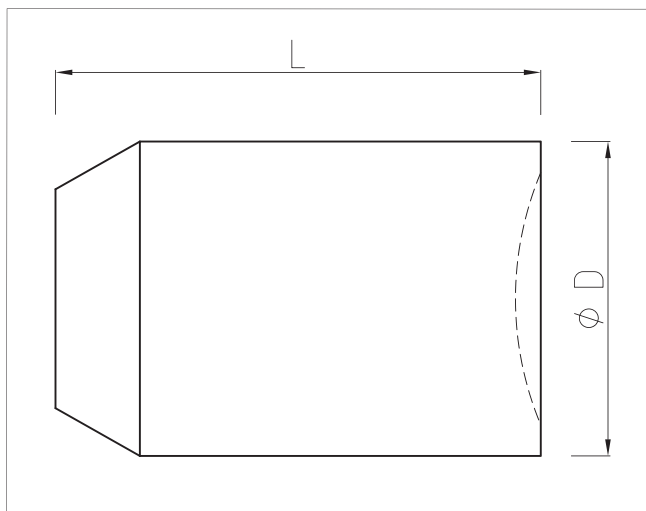

Standard dimensions in mm, Standard deviation +/- 2%.
 Spacial dimentions and executions available upon request.
 Density: 110 kg/m³ (9 lbs/cft)
 Maximum diameter reduction: 10%

Foam Pig type PU-HD-LR


The long-run foam pig is completely covered with lowwear polyurethane elastomer. It is used both for pipeline cleaning and for hydrostatic testing and provides optimal seal. The high density long-run foam pig will traverse diameter reductions upto 10%.

Size	D x L	Weight (kg)
2"	60x155	0.14
2.1/2"	72x155	0.19
3"	85x155	0.24
4"	110x195	0.40
5"	135x220	0.54
6"	165x266	1.00
7"	177x280	1.16
8"	215x330	1.90
10"	267x415	3.50
12"	317x480	5.90
14"	346x530	7.30
16"	410x595	12.00
18"	463x760	14.80
20"	513x760	20.50
22"	563x810	26.00
24"	613x880	33.00
26"	673x990	44.00
28"	718x945	49.00
30"	768x1130	67.00
32"	818x1170	78.00
34"	863x1340	98.00
36"	918x1370	112.00
38"	968x1370	123.00
40"	1018x1470	148.00
42"	1068x1580	173.00
44"	1128x1640	200.00
46"	1168x1720	224.00
48"	1228x1760	253.00
56"	1430x2100	404.00
60"	1530x2230	564.00
64"	1630x2600	645.00
76"	1950x2820	1100.00
80"	2040x3000	1550.00



kleiss & co b.v.


tel +31-78 629 1313 • fax +31-78 629 1314 • email info@kleiss.nl • web www.kleiss.nl

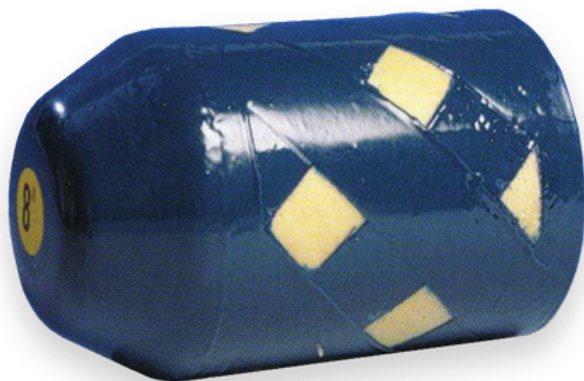

Foam Pig type PU-MD-CC

The criss cross foam pig is provided with a crisscross pattern of tough, low-wear polyurethane scraping bands. These bands generate effective pipe wall cleaning. Both the nose and back are coated as well with blue colored elastomer, which makes the pig appropriate for removal of debris.

Size	D x L	Weight (kg)
2"	60x155	0.13
2.1/2"	72x155	0.17
3"	85x155	0.22
4"	110x195	0.34
5"	135x220	0.46
6"	165x266	0.80
7"	177x280	0.96
8"	215x330	1.50
10"	267x415	2.80
12"	317x480	4.70
14"	346x530	5.80
16"	410x595	9.60
18"	463x760	11.60
20"	513x760	16.00
22"	563x810	20.00
24"	613x880	26.00
26"	673x990	34.00
28"	718x945	38.00
30"	768x1130	52.00
32"	818x1170	60.00
34"	863x1340	74.00
36"	918x1370	85.00
38"	968x1370	94.00
40"	1018x1470	113.00
42"	1068x1580	131.00
44"	1128x1640	151.00
46"	1168x1720	170.00
48"	1228x1760	191.00
56"	1430x2100	304.00
60"	1530x2230	424.00
64"	1630x2600	485.00
76"	1950x2820	710.00
80"	2040x3000	1060.00

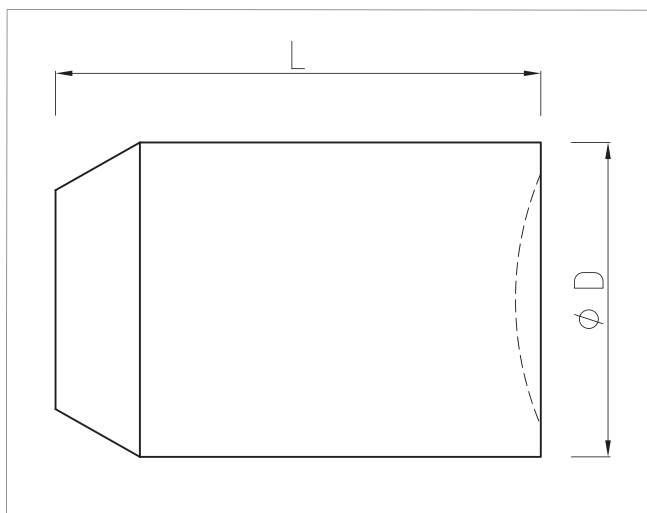


Standard dimensions in mm, Standard deviation +/- 2%.
 Spacial dimintions and executions available upon request.
 Density: 80 kg/m3 (6 lbs/cft)
 Maximum diameter reduction: 15%



kleiss & co b.v.

tel +31-78 629 1313 • fax +31-78 629 1314 • email info@kleiss.nl • web www.kleiss.nl

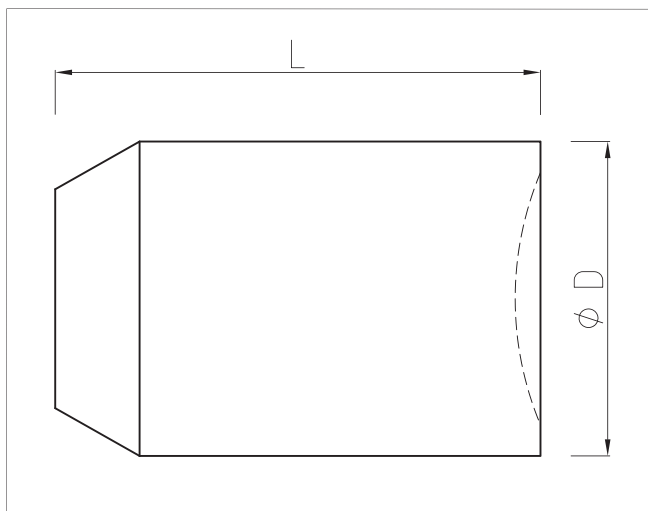


Standard dimensions in mm, Standard deviation +/- 2%.
Special dimensions and executions available upon request.
Density: 110 kg/m³ (9 lbs/cft)
Maximum diameter reduction: 10%

Foam Pig type PU-HD-CC

The criss cross foam pig is provided with a crisscross pattern of tough, low-wear polyurethane scraping bands. These bands generate effective pipe wall cleaning. Both the nose and back are coated as well with red colored elastomer, which makes the pig appropriate for heavy duty removal of debris.

Size	D x L	Weight (kg)
2"	60x155	0.14
2.1/2"	72x155	0.19
3"	85x155	0.24
4"	110x195	0.40
5"	135x220	0.54
6"	165x266	1.00
7"	177x280	1.16
8"	215x330	1.90
10"	267x415	3.50
12"	317x480	5.90
14"	346x530	7.30
16"	410x595	12.00
18"	463x760	14.80
20"	513x760	20.50
22"	563x810	26.00
24"	613x880	33.00
26"	673x990	44.00
28"	718x945	49.00
30"	768x1130	67.00
32"	818x1170	78.00
34"	863x1340	98.00
36"	918x1370	112.00
38"	968x1370	123.00
40"	1018x1470	148.00
42"	1068x1580	173.00
44"	1128x1640	200.00
46"	1168x1720	224.00
48"	1228x1760	253.00
56"	1430x2100	404.00
60"	1530x2230	564.00
64"	1630x2600	645.00
76"	1950x2820	1100.00
80"	2040x3000	1550.00

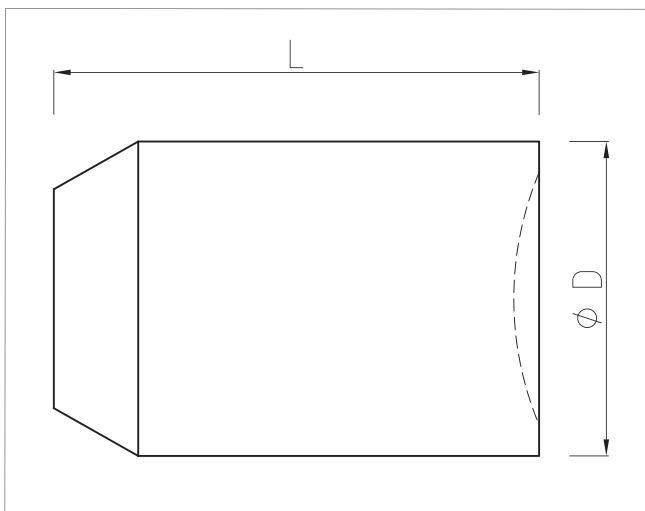


Standard dimensions in mm, Standard deviation +/- 2%.
 Spacial dimentions and executions available upon request.
 Density: 110 kg/m³ (9 lbs/cft)
 Maximum diameter reduction: 10%

Foam Pig type PU-HD-WB

The wire brush foam pig is provided with helical band of flame hardened carbon steel brushes (also available with nylon brushes). The wire brush is set at an angle in order to increase cleaning effect. These brushes generate a pipe wall cleaning and scraping effect and will remove scale, rust and sediments. The wire brush foam pig will traverse diameter reductions upto 10%. The wire brush foam pig is also available with stainless steel or plastic brushes.

Size	D x L	Weight (kg)
2"	60x145	0.22
2.1/2"	72x155	0.28
3"	85x155	0.35
4"	110x195	0.58
5"	135x220	0.77
6"	168x266	1.30
7"	177x280	1.50
8"	215x330	2.40
10"	260x415	4.40
12"	321x510	7.20
14"	348x530	8.80
16"	410x595	14.00
18"	463x760	17.00
20"	513x760	23.00
22"	563x810	30.00
24"	613x880	37.00
26"	673x990	50.00
28"	718x945	55.00
30"	768x1130	75.00
32"	818x1170	86.00
34"	863x1340	105.00
36"	918x1370	120.00
38"	968x1370	130.00
40"	1018x1470	160.00
42"	1068x1580	185.00
44"	1128x1640	215.00
46"	1168x1720	240.00
48"	1228x1760	270.00
56"	1430x2100	425.00
60"	1540x2230	595.00
64"	1640x2600	680.00
76"	1960x2820	1150.00
80"	2050x3000	1600.00

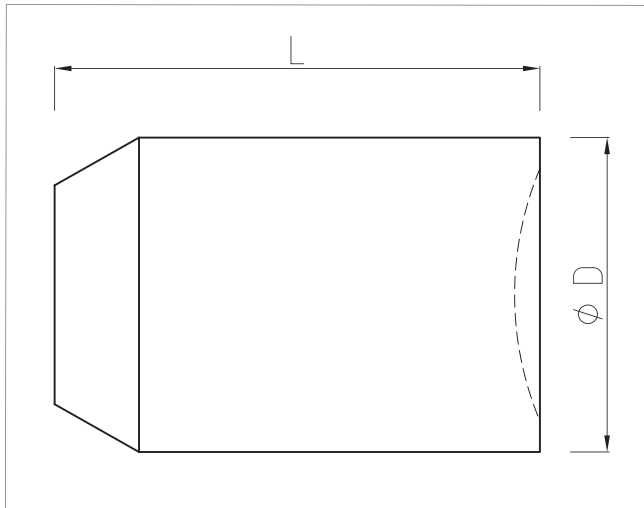

Standard dimensions in mm, Standard deviation +/- 2%.
 Spacial dimentions and executions available upon request.
 Density: 110 kg/m³ (9 lbs/cft)
 Maximum diameter reduction: 10%

Foam Pig type PU-HD-AC

The abrasive coated foam pig is provided with helical bands of heavily impregnated carborundum. These bands generate a severe scraping effect. The abrasive coated foam pig is most appropriate for removal of rust and all sorts of scale and debris.

Size	D x L	Weight (kg)
2"	64x155	0.14
2.1/2"	79x155	0.19
3"	89x155	0.24
4"	114x195	0.40
5"	143x220	0.54
6"	172x266	1.00
7"	181x280	1.16
8"	219x330	1.90
10"	274x415	3.50
12"	325x510	5.90
14"	350x530	7.30
16"	414x595	12.00
18"	459x760	14.80
20"	509x760	20.50
22"	559x810	26.00
24"	609x880	33.00
26"	669x990	44.00
28"	714x945	49.00
30"	764x1130	67.00
32"	814x1170	78.00
34"	859x1340	98.00
36"	914x1370	112.00
38"	964x1370	123.00
40"	1014x1470	148.00
42"	1064x1580	173.00
44"	1124x1640	200.00
46"	1164x1720	224.00
48"	1224x1760	253.00
56"	1424x2100	404.00
60"	1525x2250	564.00
64"	1624x2600	645.00
76"	1945x2820	1100.00
80"	2035x3000	1550.00